


STRIP LED IP65 COB 15W/mt 220V D3

ROLLA 50 metri - Senza raddrizzatore



220V

120°



1500Lm/mt



286LED/mt



| CODICE | PARAMETRI BASE | | | | | SPECIFICHE | | | | |
|-------------|----------------|-----------------|------------|---------------|----------------|------------|-------------|----------------|-----------|------|
| | Misure | Unità di Taglio | Input Volt | Watt nominali | Watt effettivi | CRI | Colore Luce | Lumen nominali | Materiale | IP |
| AV0003COO-E | 50000x10x4,5mm | 50mm | 220V | 15W/m | - | ≥80 | 6000K | 1500LM/m | Silicone | IP65 |
| AV0002COO-E | 50000x10x4,5mm | 50mm | 220V | 15W/m | - | ≥80 | 4000K | 1500LM/m | Silicone | IP65 |
| AV0001COO-E | 50000x10x4,5mm | 50mm | 220V | 15W/m | - | ≥80 | 3000K | 1500LM/m | Silicone | IP65 |

ACCESSORI INCLUSI:

Kit 5pz innesto rapido di alimentazione

Kit 5pz tappo di chiusura

ACCESSORI ACQUISTABILI SEPARATAMENTE:

Cod. [AV0007COO-E](#)

Connettore di alimentazione rapido



Cod. [AV0008COO-E](#)

Connettore di giunzione dritto




Cod. [AV0009COO-E](#)

Connettore di giunzione angolare "L"



DIMENSIONI:

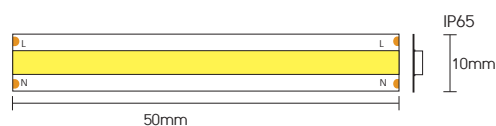

STRIP LED IP65 COB 15W/mt 220V D3

ROLLA 50 metri - Senza raddrizzatore

Integral Sphere Testing Report

Chromaticity coordinates: $x=0.3163$ $y=0.3366$ $u(u')=0.1975$ $v=0.3152$ $v'=0.4729$
 CCT: $T_c=6270K$ ($duv=0.00528$) Color Ratio: $R=0.134$ $G=0.820$ $B=0.046$
 Peak Wavelength: 451.4nm Half Bandwidth: 19.5nm
 Dominant Wavelength: 494.2nm Color Purity: 0.055
 Color Render Index: $R_a=80.3$

| | | | | | | | |
|--------|--------|--------|--------|--------|--------|--------|--------|
| R1 =82 | R2 =81 | R3 =77 | R4 =88 | R5 =81 | R6 =73 | R7 =91 | R8 =80 |
| R9 =22 | R10=52 | R11=87 | R12=41 | R13=81 | R14=87 | R15=81 | |

