


CR17335E

Electrical characteristics

Typical values relative to cells stored for one year

Nominal capacity (Discharged capacity at 0.5mA, +25°C, 2V cut off)	1500mAh
Nominal voltage	3.0V
Max.recommended continuous current Discharged to 2V at +25°C permitting 50% of the Nominal capacity to be achieved	1000mA
Max. Pulse current 15 seconds at 25°C drained with 50% of the nominal capacity, yield voltage reading above 2V. The value may vary with the pulse characteristics, the temperature and the cell's previous history.	2500mA
Storage	Max 30°C
Operating temperature range	-40r+70°C
Weight	Å19g

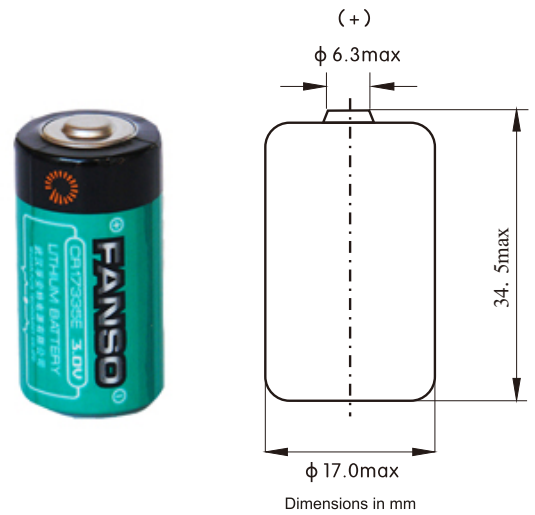


Available Terminations


- /P Axial pin
- /T/PT2 Radial Pin
- /PT/TP Polarized Tab

Special terminal can be made according to customer's requirement


Discharge characteristics at 25°C

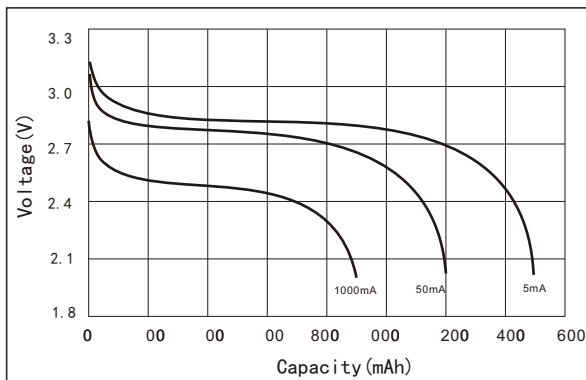

Voltage vs. Current an Temperature

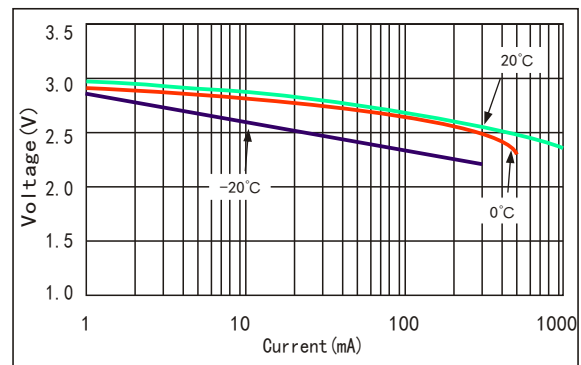

Capacity vs. current and Temperature

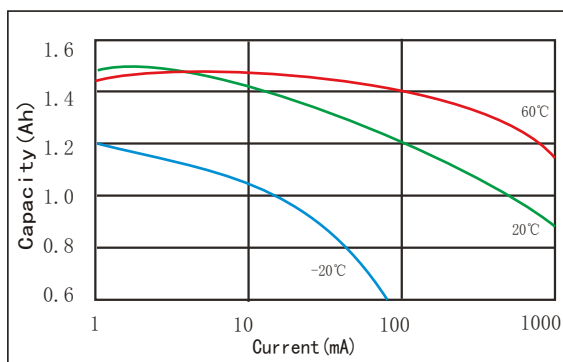

Storage Characteristics

