



FLEX NEON **ARMORED** DA INCASSO 24V IP67





CODICE	PARAMETRI BASE						PARAMETRI FOTOMETRICI					
	Misure	Unità di Taglio	LED/mt	Input Volt	MacAdam ellipse	Watt	CRI	Colore Luce	Lumen nominali	Adesivo	Chip	IP
AV0005LU-E	5000x4,95x16,80 mm	50mm	-	24VDC	3 Step	10W/mt	≥80	3000K	192LM/mt	No	Epistar	IP67
AV0006LU-E	5000x4,95x16,80 mm	50mm	-	24VDC	3 Step	10W/mt	≥80	4000K	192LM/mt	No	Epistar	IP67


**Lunghezza Flex standar 5mt, lunghezza custom da 0,1 a 5mt.
Tipologia cavo: 2x20AWG wire RED "+"/BLK "-".

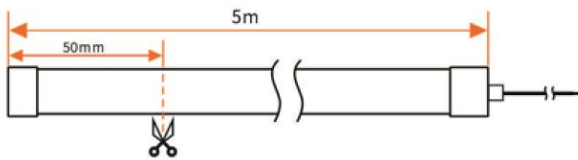


SIDE VIEW - FLESSIONE LATERALE
R < 90 mm

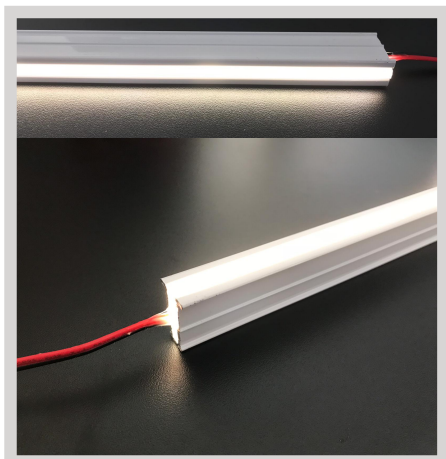

ACCESSORI:



Profilo bianco da incasso 1MT : AV0007LU-E



Forbici per taglio flex: AV9999LU-E