










**MIBOXER**® | Mi·Light  
Subordinate New Brand

Codici:  
AV5530XIAA  
&  
AV5531XIAA

**Anti-glare RGB+CCT LED Downlight**


Model No.: FUT070 / FUT071

## Features

-  Deepen the cover  
Prevent glare effectively
-  RGB+CCT  
16 Millions of colors to choose
-  Color temperature  
2700~6500K
-  Dimmable  
Saturation control
-  2.4G RF wireless transmission  
technology
-  Signal transmitting &  
Modes synchronization
-  Remote control  
Control distance 30m
-  Smart phone APP control  
(2.4GHz gateway is needed)
-  Support third party voice control  
(2.4GHz gateway is needed)


## 6W Anti-glare RGB+CCT LED Downlight

Model No.: FUT070 / AV5530XIAA  
Input Voltage: AC100~240V 50/60Hz  
Power: 6W  
Working Temp.: -20~60°C  
CRI: >80 PF: >0.5  
Color Temperature: 2700K~6500K  
Luminous Flux: 550LM  
Lifespan: 50000 hours  
Beam Angle: 60°  
RF: 2.4GHz  
Control Distance: 30m

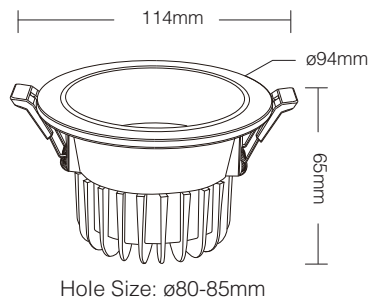


## 12W Anti-glare RGB+CCT LED Downlight

Model No.: FUT071 / AV5531XIAA  
Input Voltage: AC100~240V 50/60Hz  
Power: 12W  
Working Temp.: -20~60°C  
CRI: >80 PF: >0.5  
Color Temperature: 2700K~6500K  
Luminous Flux: 1000LM  
Lifespan: 50000 hours  
Beam Angle: 60°  
RF: 2.4GHz  
Control Distance: 30m

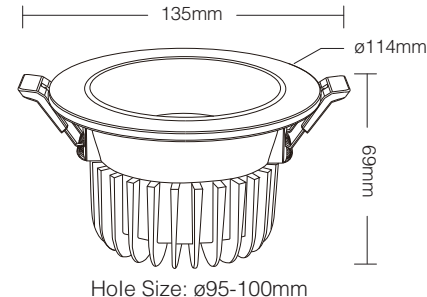



## Instructions

1. Please open the hole on the ceiling according to the correct size of Diagram 1.
2. Connect the driver properly according to the wire connection Diagram 2. And then put the driver and wire into the ceiling from the hole.
3. Push in the two spring elements, make sure that they are deployed and anchored on the back of the ceiling Diagram 3 and 4.

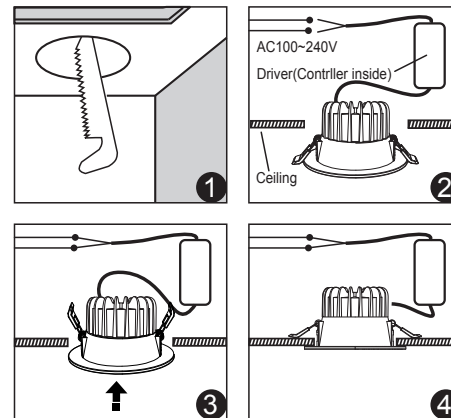

## Link / Unlink

Compatible with these remote controls  
(Purchased separately)

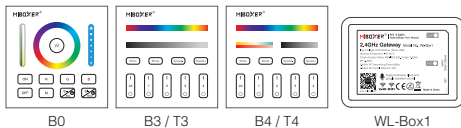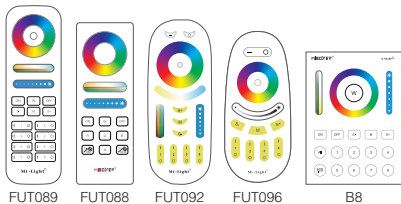

### **NOTE:**

Lighting can be working after linking with remote;  
for more details, pls read the remote instruction.

## Dynamic Mode Sheet


Number	Dynamic Mode	Brightness / Saturation / Speed
1	Mardi Gras	Adjustable
2	Automatic color change	
3	Sam	
4	Gemstone	
5	Twilight	
6	American	
7	Fat Tuesday	
8	Party	
9	Slow Color Splash	

## Signal transmitting

One Downlight can transmit the signals from the remote control to another Downlight within 30m, as long as there is a Downlight within 30m, the remote control distance can be limitless.

## Modes synchronization

Different Downlight can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and within 30m distance.

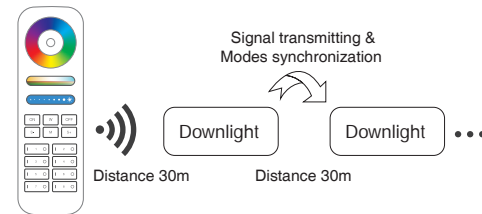

## Attention

1. When install the lighting fixtures, pls switch off the power to make sure the safty.
2. Please check whether the input voltage supply is in accordance with the lighting fixtures.
3. Non-professional user cannot dismantle the lighting fixtures directly, otherwise, it may cause fire and electric shock.
4. Please do not use lighting fixtures around the mental area and high magnetic field, otherwise, it will badly affect the control distance.



Made in China