

CR-P2

Electrical characteristics

Typical values relative to cells stored for one year

Nominal capacity

(Discharged capacity at 0.5mA, +25°C, 2V cut off)

Nominal voltage

Max.recommended continuous current

Discharged to 2V at +25°C permitting 50% of the Nominal capacity to be ac

Max. Pulse current

15 seconds at 25°C drained with 50% of the nominal capacity, yield voltage above 2V. The value may vary with the pulse characteristics, the temperatur cell's previous history.

Storage

Operating temperature range

Weight

1500mAh

6.0V


1000mA

2500mA

Max 30°C


-40~+70°C

≈38g

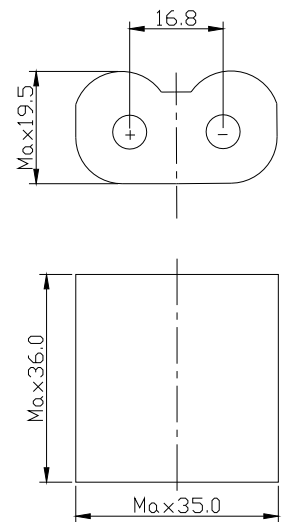


Dimensions in mm


Discharge characteristics at 25°C

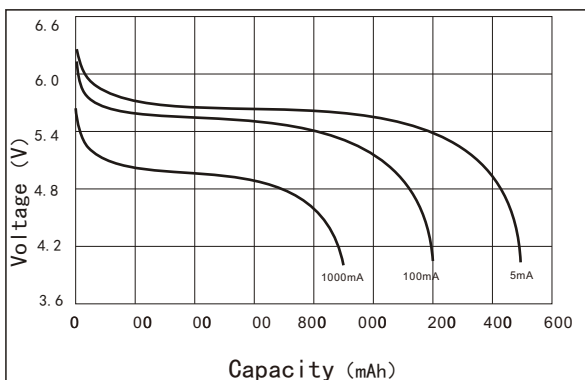

Voltage vs. Current an Temperature

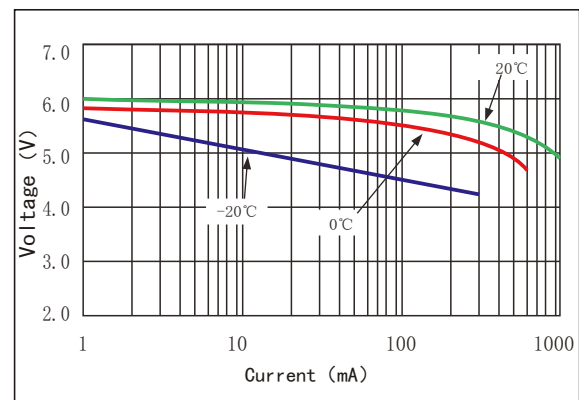

Capacity vs. current and Temperature

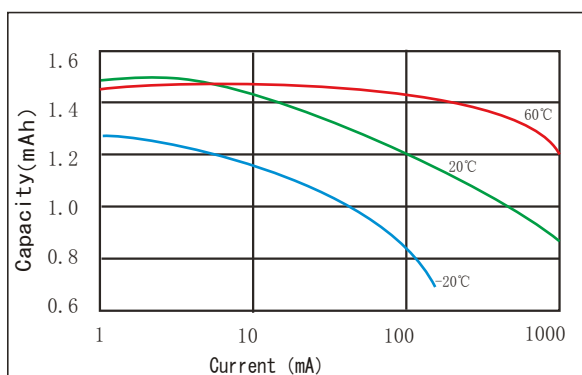

Storage Characteristics

