

SPECIFICATION



CP-9V 9V

3 CP502440 in series

Electrical characteristics

(Typical values relative to cells stored for one year at +30 °C max)

- | | |
|---|---------------|
| ◉ Nominal capacity | 1200mAh |
| Discharged capacity at 1mA, +25 °C, 5.4V cut off | |
| ◉ Open circuit voltage | 9V |
| ◉ Max. recommended continuous current | 120mA |
| Discharged to 5.4V at +25 °C permitting 50% of the nominal capacity to be achieved | |
| ◉ Max. Pulse capability | 400mA |
| 400mA,0.1 second pulses every 2 minutes,drained with 50%,1mA at 25 °C from undischarged cells with 20μA base current,yield voltage readings above 5.4V, the value may vary according to the pulse characteristics,the temperature and the cell's previous history | |
| ◉ Operating temperature rang | -20 °C~+60 °C |

STORAGE:

Stored in clean, dry and cool circumstances (the temperature should be 20 degrees or lower, less than 30 degrees)

WARNING:

Don't charge, crush, disassemble, expose contents to water, heat above 85 °C or may lead to explosion, burn or poison goods leakage. Discarded battery should be buried deeply to the ground.

Key features

- High and stable operating voltage
- Long shelf life
- Annual self-discharge rate lower than 2% at +25 °C
- Hermetic glass-to-metal sealing
- Compliant with IEC 86-4 safety standard
- Non-restricted for transport

 UL Component Recognition
File Number MH46165
R o H S 


Main applications

- Public instrument
- Alarms or security equipment
- Memory backup
- Smoke detectors
- Professional electronic equipment
- Real time clock


.....

CP-9V 1200mAh

Discharge characteristics at 25°C



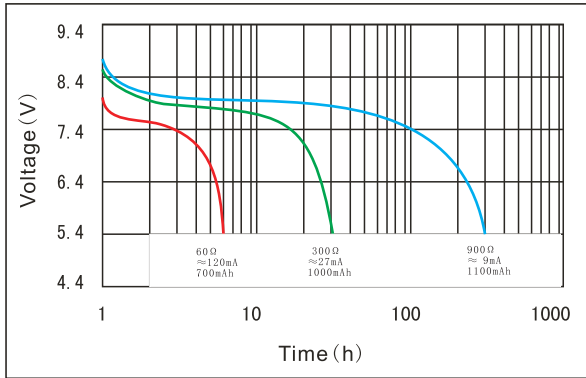


Hard plastic casing

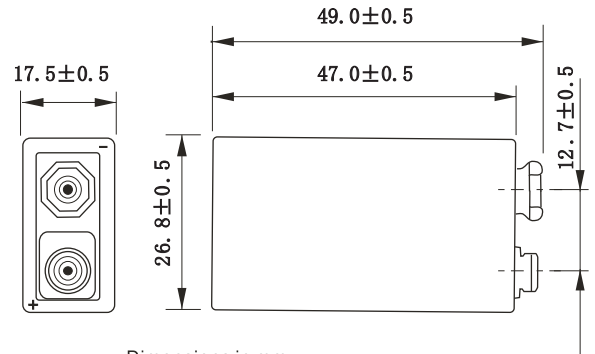


Dimensions in mm
Weight: 29g

Voltage vs Temperature curve

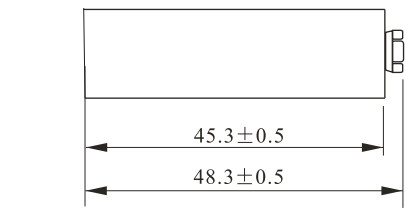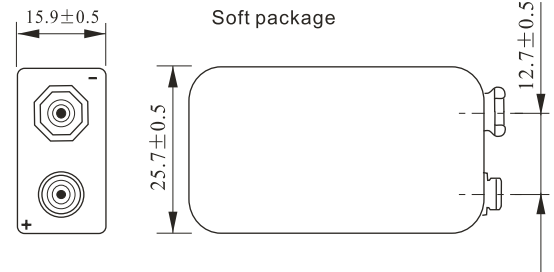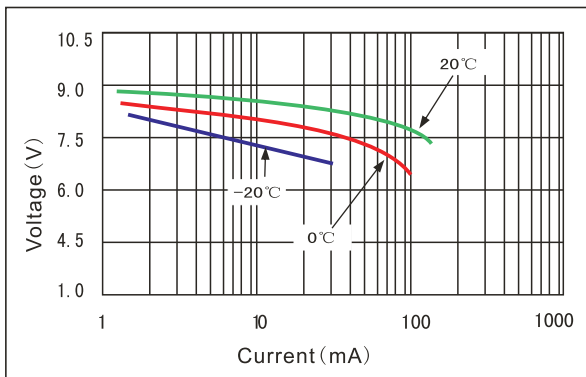

Dimensions in mm
Weight: 26g

Capacity vs Current curve (cut off with 6.0V)

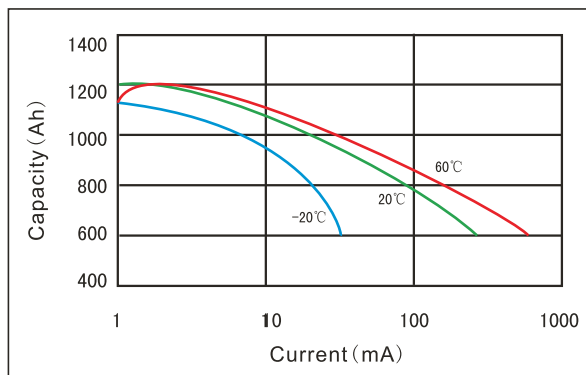

Data in this page is subject to change without notice and becomes contractual only after written confirmation by Fute.

Wuhan Fute Technology CO.,LTD

Address: No.1 Sitai Industrial Park, Yongfeng Avenue, Hanyang District, Wuhan City, China.

Tel: 86-27-84453199, 84452919 Fax: 86-27-84453116 Post Code: 430051

http://www.fansobattery.com E-mail: info@fansobattery.com