

ER26500H

Electrical characteristics

Typical values relative to cells stored for one year

Nominal capacity

(Discharged capacity at 0.5mA, +25°C, 2V cut off)

Nominal voltage

Max.recommended continuous current

Discharged to 2V at +25°C permitting 50% of the Nominal capacity to

Max. Pulse current

200mA, 0.1 second pulses every 2 minutes, drained with 50%, 2mA at 2 undischarged cells with 20µA base current, yield voltage readings abc may vary according to the pulse characteristics, the temperature and history.

Storage

Operating temperature range

Weight

9000mAh

3.66V


100mA

200mA

Max 30°C

-55~+85°C

≈53g

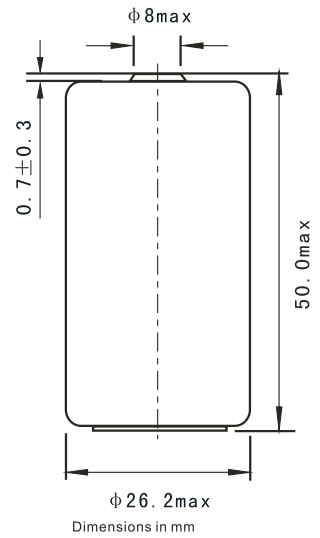


Available Terminations


- /P Axial pin
- /T/PT2 Radial Pin
- /PT/TP Polarized Tab

Special terminal can be made according to customer's requirement


Discharge characteristics at 25°C

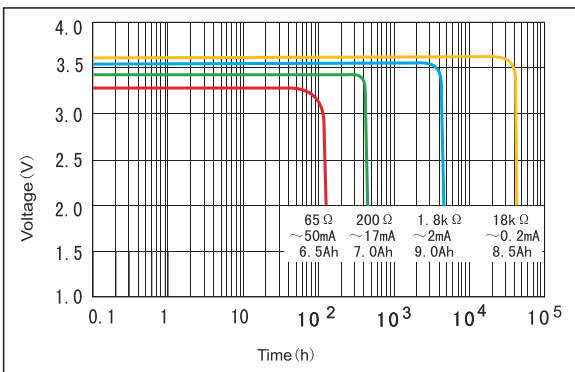

Voltage vs. Current an Temperature

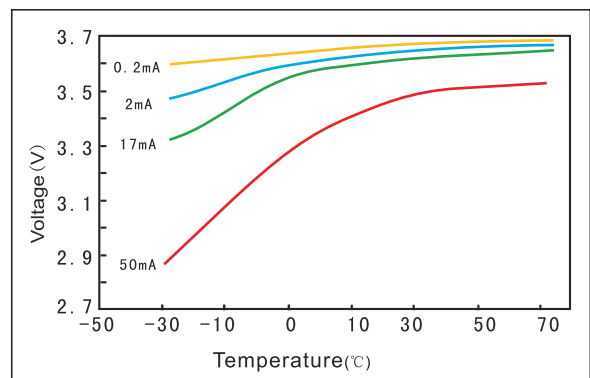

Capacity vs. current and Temperature

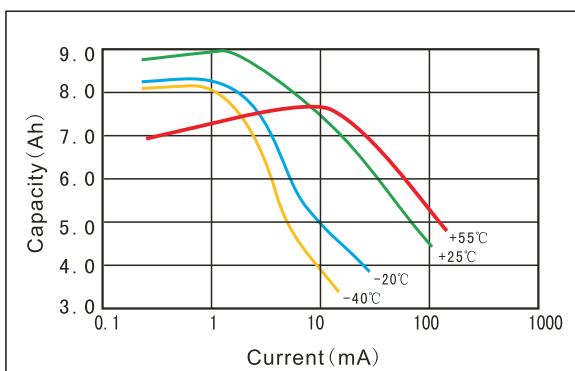

Storage Characteristics

