
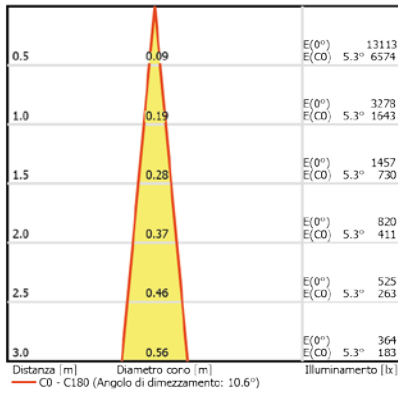




AV01003GN

PHOTOMETRIC FILES



NARROW 350 mA

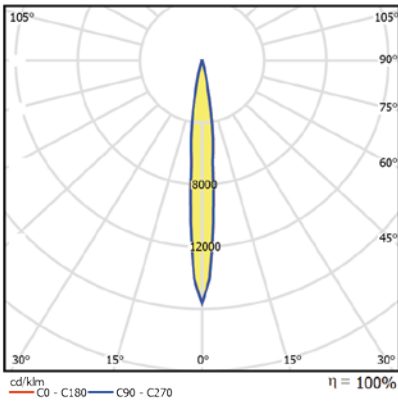



NARROW 500 mA

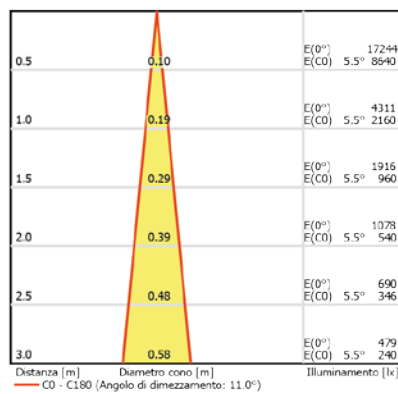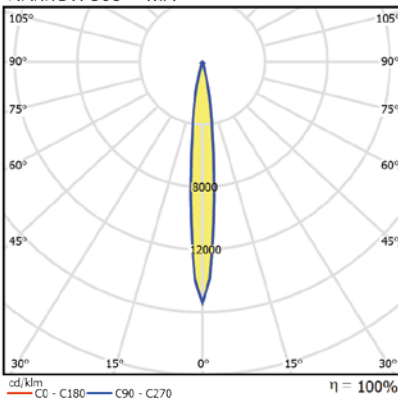


MEDIUM 350 mA

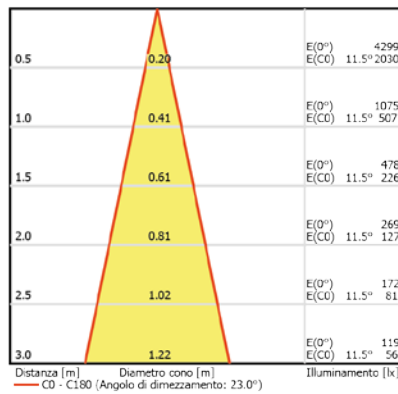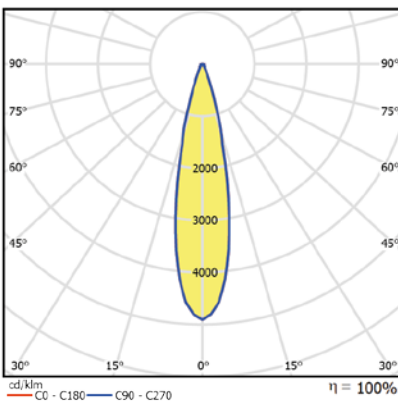

MEDIUM 500 mA

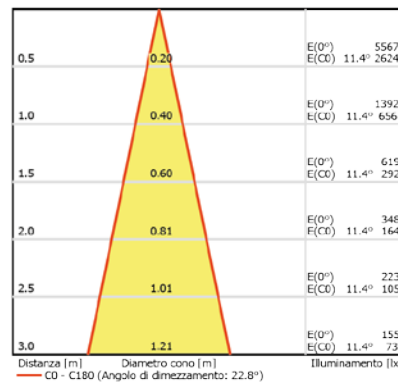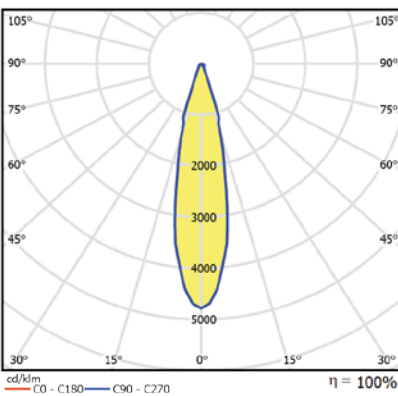


WIDE 350 mA

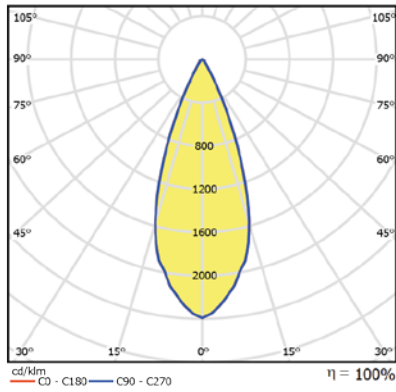

Distanza [m]	Diametro cono [m]	Iluminamento [lx]
0.5	0.35	E(0°) 2000 E(C0) 19.1° 849
1.0	0.69	E(0°) 500 E(C0) 19.1° 212
1.5	1.04	E(0°) 222 E(C0) 19.1° 94
2.0	1.39	E(0°) 125 E(C0) 19.1° 53
2.5	1.73	E(0°) 80 E(C0) 19.1° 34
3.0	2.08	E(0°) 56 E(C0) 19.1° 24

— C0 - C180 (Angolo di dimezzamento: 38.2°)


WIDE 500 mA

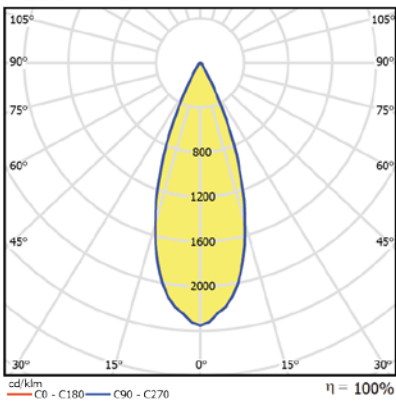

Distanza [m]	Diametro cono [m]	Iluminamento [lx]
0.5	0.34	E(0°) 2597 E(C0) 19.0° 1104
1.0	0.69	E(0°) 649 E(C0) 19.0° 276
1.5	1.03	E(0°) 289 E(C0) 19.0° 123
2.0	1.38	E(0°) 162 E(C0) 19.0° 69
2.5	1.72	E(0°) 104 E(C0) 19.0° 44
3.0	2.07	E(0°) 72 E(C0) 19.0° 31

— C0 - C180 (Angolo di dimezzamento: 38.0°)


VERY WIDE 350 mA

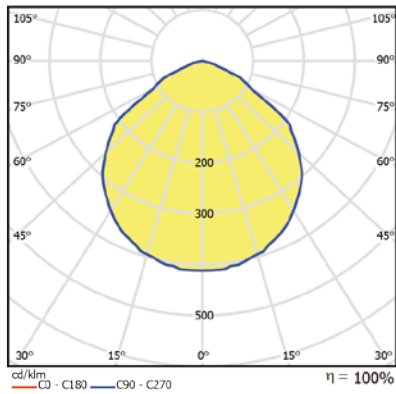

Distanza [m]	Diametro cono [m]	Iluminamento [lx]
0.5	1.40	E(0°) 353 E(C0) 54.4° 35
1.0	2.79	E(0°) 88 E(C0) 54.4° 9
1.5	4.19	E(0°) 39 E(C0) 54.4° 4
2.0	5.59	E(0°) 22 E(C0) 54.4° 2
2.5	6.98	E(0°) 14 E(C0) 54.4° 1
3.0	8.38	E(0°) 10 E(C0) 54.4° 1

— C0 - C180 (Angolo di dimezzamento: 108.8°)

VERY WIDE 500 mA

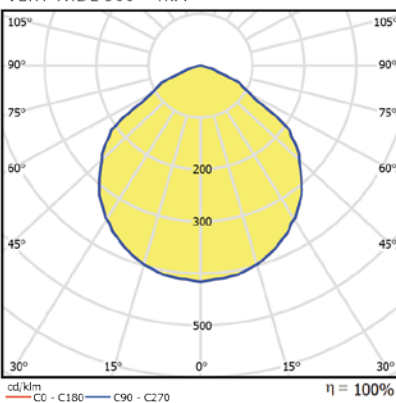

Distanza [m]	Diametro cono [m]	Iluminamento [lx]
0.5	1.39	E(0°) 456 E(C0) 54.2° 46
1.0	2.77	E(0°) 114 E(C0) 54.2° 11
1.5	4.16	E(0°) 51 E(C0) 54.2° 5
2.0	5.55	E(0°) 28 E(C0) 54.2° 3
2.5	6.93	E(0°) 18 E(C0) 54.2° 2
3.0	8.32	E(0°) 13 E(C0) 54.2° 1

— C0 - C180 (Angolo di dimezzamento: 108.4°)