

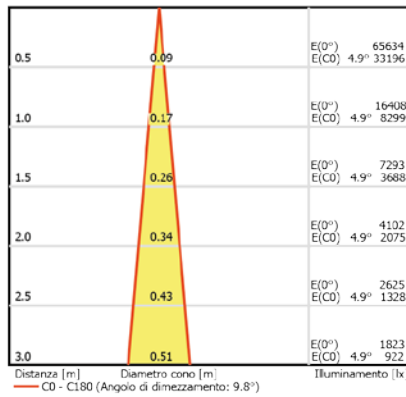
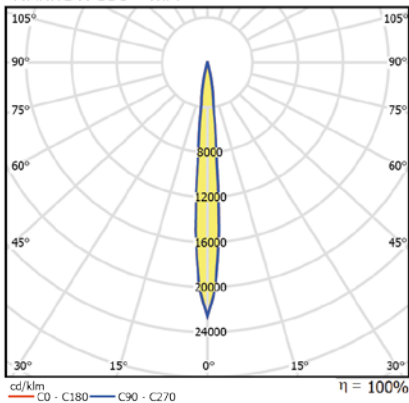


PHOTOMETRIC FILES



NARROW 350 mA

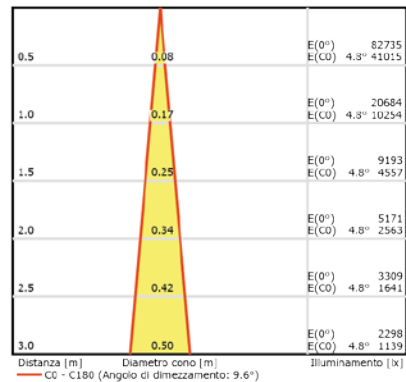



NARROW 500 mA

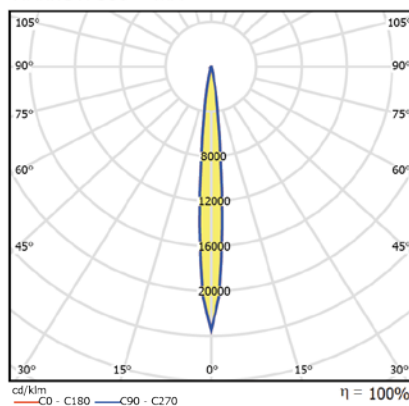


MEDIUM 350 mA

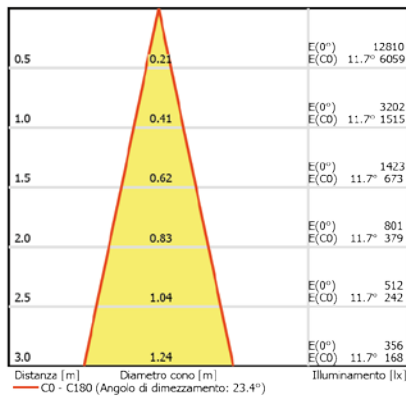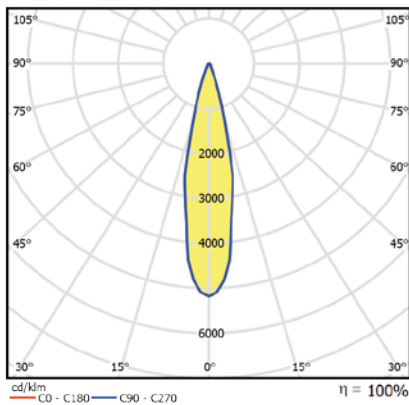

MEDIUM 500 mA

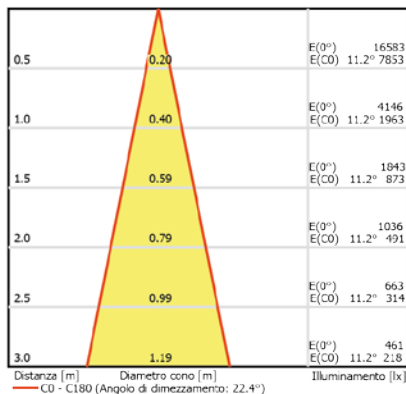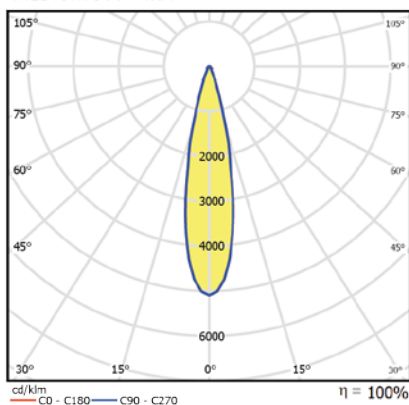


WIDE 350 mA

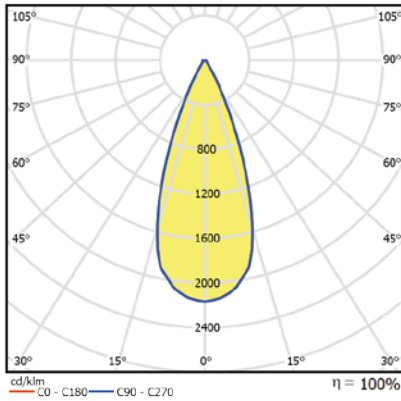

0.5	0.36	E(0°) 5553 E(C0) 19.9° 2320
1.0	0.72	E(0°) 1388 E(C0) 19.9° 580
1.5	1.09	E(0°) 617 E(C0) 19.9° 258
2.0	1.45	E(0°) 347 E(C0) 19.9° 145
2.5	1.81	E(0°) 222 E(C0) 19.9° 93
3.0	2.17	E(0°) 154 E(C0) 19.9° 64

Distanza [m] Diametro cono [m] Illuminamento [lx]
 — C0 - C180 (Angolo di dimezzamento: 39.8°)


WIDE 500 mA

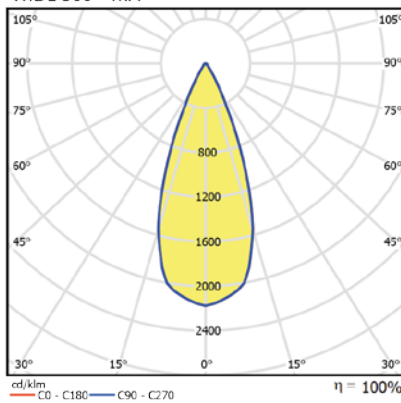

0.5	0.36	E(0°) 7311 E(C0) 19.9° 3040
1.0	0.72	E(0°) 1828 E(C0) 19.9° 766
1.5	1.09	E(0°) 812 E(C0) 19.9° 338
2.0	1.45	E(0°) 457 E(C0) 19.9° 190
2.5	1.81	E(0°) 292 E(C0) 19.9° 122
3.0	2.17	E(0°) 203 E(C0) 19.9° 84

Distanza [m] Diametro cono [m] Illuminamento [lx]
 — C0 - C180 (Angolo di dimezzamento: 39.8°)


VERY WIDE 350 mA

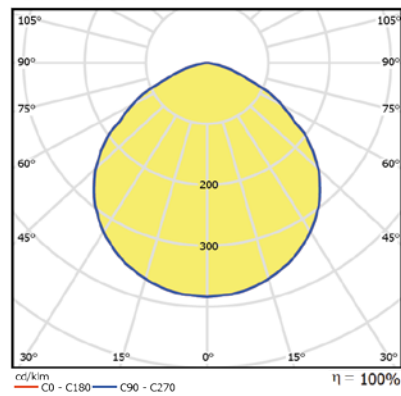

0.5	1.40	E(0°) 1037 E(C0) 54.4° 102
1.0	2.79	E(0°) 259 E(C0) 54.4° 26
1.5	4.19	E(0°) 115 E(C0) 54.4° 11
2.0	5.59	E(0°) 65 E(C0) 54.4° 6
2.5	6.98	E(0°) 41 E(C0) 54.4° 4
3.0	8.38	E(0°) 29 E(C0) 54.4° 3

Distanza [m] Diametro cono [m] Illuminamento [lx]
 — C0 - C180 (Angolo di dimezzamento: 108.8°)

VERY WIDE 500 mA

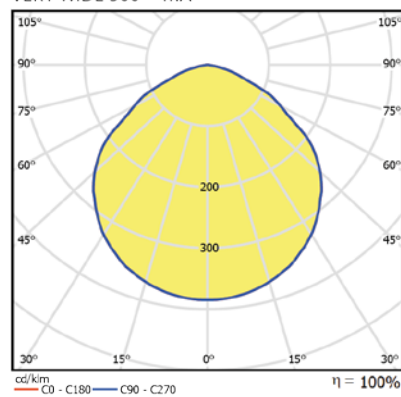

0.5	1.40	E(0°) 1355 E(C0) 54.4° 134
1.0	2.79	E(0°) 339 E(C0) 54.4° 34
1.5	4.19	E(0°) 151 E(C0) 54.4° 15
2.0	5.59	E(0°) 85 E(C0) 54.4° 8
2.5	6.98	E(0°) 54 E(C0) 54.4° 5
3.0	8.38	E(0°) 38 E(C0) 54.4° 4

Distanza [m] Diametro cono [m] Illuminamento [lx]
 — C0 - C180 (Angolo di dimezzamento: 108.8°)