

LED SIGNAGE BACK LIGHTING



Features

- High lumen performance
- Low voltage 12 VDC system
- Wide viewing angle and helps eliminate wasted light
- Pre-drilled holes and industrial-grade mounting tape
- Contains no lead, mercury or glass
- 5- years warranty


Application

- 5-15cm signage lighting
- 5-15cm large channel letters

Specifications


Input Vol.	12VDC	12VDC	12VDC
Power/pc	0.3W	0.66W	1.02W
Lumen/pc	30lm	65lm	93lm
Led Type	SMD 2835	SMD 2835	SMD 2835
CRI	≥80	≥80	≥80
Max QTY/serie	30pcs	30pcs	30pcs
Dimension (LxWxD)	18.2x7x9.9mm	38.8x19.3x10.5mm	60.8x19.3x10.5mm

Color Available

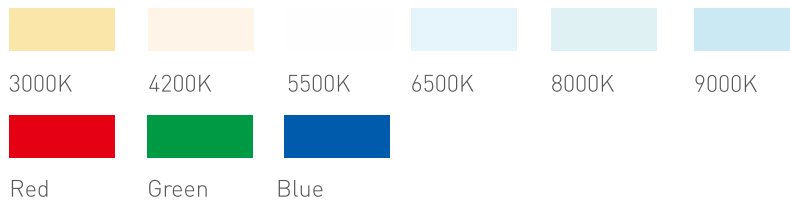


Dimension

Unit:mm[in]

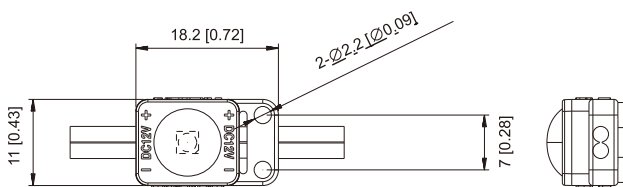


BV-PT8-S-1

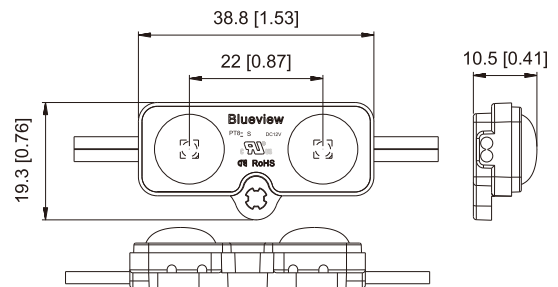

BV-PT8-S-2

LED SIGNAGE BACK LIGHTING

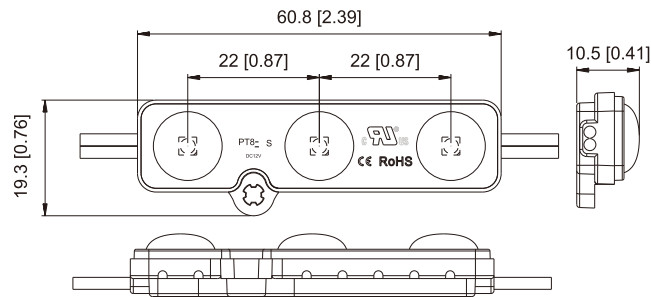

BV-PT8-S-3

Installation //

Thickness	Distance (x,y)	Qty/ m ²	Illumination
7cm	11x7cm	8x13pcs	4140-5080lux
10cm	15 x7cm	6x13pcs	2420-3500lux
12cm	15x5cm	6x17pcs	2250-2860lux
12cm	13x7cm	7x13pcs	2260-3320lux
15cm	13x5cm	7x17pcs	2600-3050lux
18cm	11x5cm	8x17pcs	2420-3140lux

Package //

Part No.	Dimension (mm)	Carton (mm)	Qty/ carton (pcs)	Net Weight (NW/kg)	Gross Weight (GW/kg)
BV-PT8-S-1	18.2*11	570*375*285	8000	21.4(1±10%)	25.4(1±10%)
BV-PT8-S-2	38.8*19.3	570*375*285	1800	13.6(1±10%)	15.0(1±10%)
BV-PT8-S-3	60.8*19.3	570*375*285	1800	18.0(1±10%)	19.4(1±10%)

1. Outer carton dimension:570*375*285mm
- 2.BV-PT8-S-1:30pcs for one strings,4 strings(400pcs) in one anti-static bag
- 3.BV-PT8-S-2&BV-PT8-S-3:30pcs for one strings,3 strings(90pcs) in one anti-static bag
4. One carton contain twentyanti-static bag