

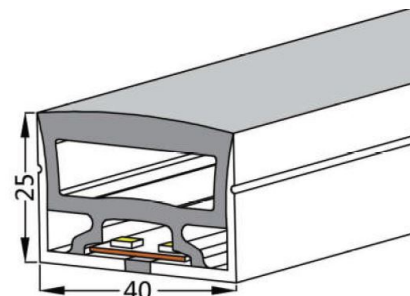


FLEX NEON 4025 FLAT 24V IP67




| CODICE | PARAMETRI BASE | | | | | | PARAMETRI FOTOMETRICI | | | | | |
|------------|----------------|-----------------|--------|------------|-----------------|----------|-----------------------|-------------|----------------|-------------|---------|------|
| | Misure | Unità di Taglio | LED/mt | Input Volt | MacAdam ellipse | Watt | CRI | Colore Luce | Lumen nominali | Adesivo | Chip | IP |
| AV0099LU-E | 1000x40x25 mm | 50mm | 280 | 24VDC | 3 Step | 19,2W/mt | ≥82 | 3000K | 979~1229LM/mt | 3M VHB 5952 | Epistar | IP67 |
| AV0100LU-E | 1000x40x25 mm | 50mm | 280 | 24VDC | 3 Step | 19,2W/mt | ≥82 | 3500K | 979~1229LM/mt | 3M VHB 5952 | Epistar | IP67 |
| AV0085LU-E | 1000x40x25 mm | 50mm | 280 | 24VDC | 3 Step | 19,2W/mt | ≥82 | 4000K | 979~1229LM/mt | 3M VHB 5952 | Epistar | IP67 |

**Lunghezza Flex standar 5mt, lunghezza custom da 0,1 a 10mt.
Tipologia cavo: 2x0,5mm² - 20AWG wire.

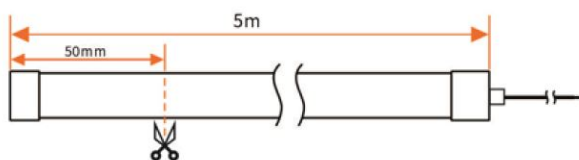

TOP VIEW - FLESSIONE VERTICALE
R<60 mm

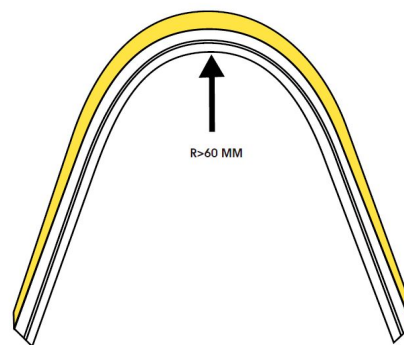

ACCESSORI:



Tappi con /senza foro

Clip di fissaggio