



STRIP LED 2835 9,6W/MT 200Lm/W 24V



5 metri - 25 metri

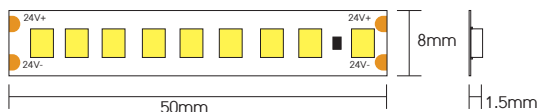

CODICE	PARAMETRI BASE				PARAMETRI FOTOMETRICI					
	Misure	Unità di taglio	Input Volt	Watt nominali	CRI	Colore Luce	Lumen nominali	Lumen effettivi	Classe Erp EcoDesign	IP
AV0110CBET-E	5000x8x1.5mm	9LED/50mm	24VDC	9,6W/m	≥80	6500K	1920LM/m	1920LM/m	C	IP20
AV0110NBET-E	5000x8x1.5mm	9LED/50mm	24VDC	9,6W/m	≥80	4000K	1920LM/m	1920LM/m	B	IP20
AV0110WBET-E	5000x8x1.5mm	9LED/50mm	24VDC	9,6W/m	≥80	3000K	1920LM/m	1776LM/m	C	IP20
AV0110-25CBET-E	25000x8x1.5mm	9LED/50mm	24VDC	9,6W/m	≥80	6500K	1920LM/m	1920LM/m	C	IP20
AV0110-25NBET-E	25000x8x1.5mm	9LED/50mm	24VDC	9,6W/m	≥80	4000K	1920LM/m	1920LM/m	B	IP20
AV0110-25WBET-E	25000x8x1.5mm	9LED/50mm	24VDC	9,6W/m	≥80	3000K	1920LM/m	1776LM/m	C	IP20

STRIP LED 2835 12W/MT 150Lm/W 24V

5 metri

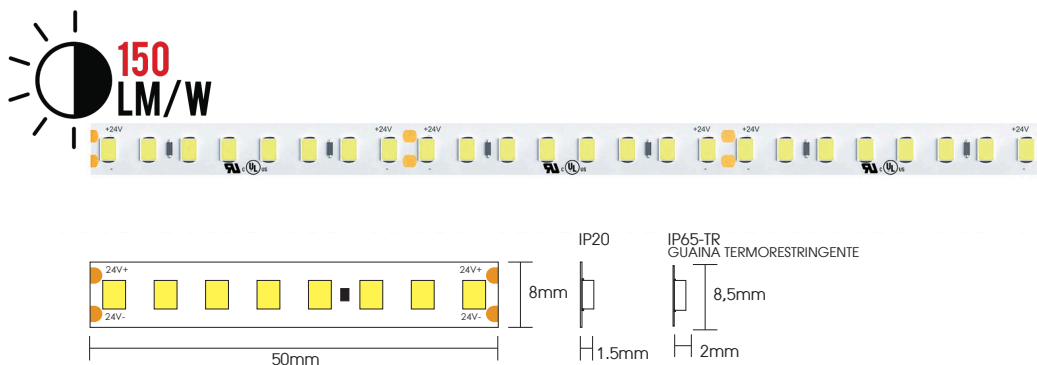

CODICE	PARAMETRI BASE				PARAMETRI FOTOMETRICI					
	Misure	Unità di taglio	Input Volt	Watt nominali	CRI	Colore Luce	Lumen nominali	Lumen effettivi	Classe Erp EcoDesign	IP
AV2582CIAA	5000x8x1.5mm	8LED/50mm	24VDC	12W/m	≥80	6000K	1800LM/m	1650LM/m	D	IP20
AV4495CIAA	5000x8x1.5mm	8LED/50mm	24VDC	12W/m	≥80	5000K	1800LM/m	1630LM/m	F	IP20
AV2580NIAA	5000x8x1.5mm	8LED/50mm	24VDC	12W/m	≥80	4000K	1800LM/m	1630LM/m	D	IP20
AV4421WIAA	5000x8x1.5mm	8LED/50mm	24VDC	12W/m	≥80	3500K	1800LM/m	1630LM/m	D	IP20
AV2581WIAA	5000x8x1.5mm	8LED/50mm	24VDC	12W/m	≥80	3000K	1800LM/m	1580LM/m	D	IP20
AV6270WIAA	5000x8x1.5mm	8LED/50mm	24VDC	12W/m	≥80	2700K	1800LM/m	1560LM/m	D	IP20
AV6792CIAA	5000x8,5x2mm	8LED/50mm	24VDC	12W/m	≥80	6000K	1800LM/m	1650LM/m	E	IP65-TR
AV6791NIAA	5000x8,5x2mm	8LED/50mm	24VDC	12W/m	≥80	4000K	1800LM/m	1630LM/m	E	IP65-TR
AV6790WIAA	5000x8,5x2mm	8LED/50mm	24VDC	12W/m	≥80	3000K	1800LM/m	1580LM/m	E	IP65-TR