
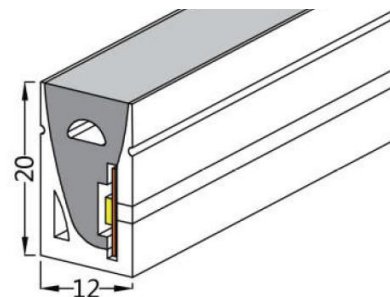






# FLEX NEON 1220 FLAT 24V IP65 1 CUT



CODICE	PARAMETRI BASE						PARAMETRI FOTOMETRICI					
	Misure	Unità di Taglio	LED/mt	Input Volt	MacAdam ellipse	Watt	CRI	Colore Luce	Lumen nominali	Adesivo	Chip	IP
AV0114LU-E1CUT	12x20 mm 5MT	10mm	140	24VDC	3 Step	15W/mt	>90	3000K	630LM/mt	3M VHB 5952	Epistar	IP65
AV0114LU-E-10M/1CUT	12x20 mm 10MT	10mm	140	24VDC	3 Step	15W/mt	>90	3000K	630LM/mt	3M VHB 5952	Epistar	IP65

\*\*Lunghezza Flex standard 5mt, lunghezza custom da 0,1 a 20mt.  
Tipologia cavo: 2x0,5mm<sup>2</sup> - 20AWG wire.

SIDE VIEW - FLESSIONE ORIZZONTALE  
R < 60 mm

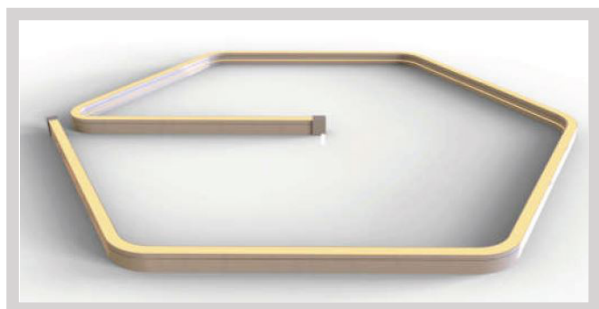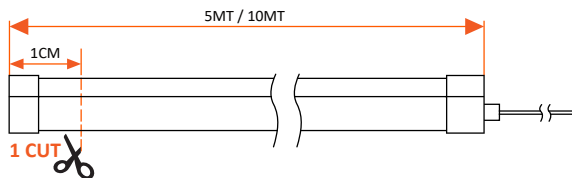

## ACCESSORI:



Tappo con foro:  
AV0220LU-E



Tappo senza foro:  
AV0221LU-E



Clip di fissaggio:  
AV0219LU-E



Forbici per taglio flex:  
AV9999LU-E