



FLEX NEON 1515 DOME 24V IP67




CODICE	PARAMETRI BASE						PARAMETRI FOTOMETRICI					
	Misure	Unità di Taglio	LED/mt	Input Volt	MacAdam ellipse	Watt	CRI	Colore Luce	Lumen nominali	Adesivo	Chip	IP
AV0023LU-E	5000x15x15 mm	50mm	140	24VDC	3 Step	15W/mt	≥92	3000K	960~1300LM/mt	3M VHB 5952	Epistar	IP67
AV0024LU-E	5000x15x15 mm	50mm	140	24VDC	3 Step	15W/mt	≥92	4000K	960~1300LM/mt	3M VHB 5952	Epistar	IP67
AV0115LU-E	5000x15x15 mm	50mm	140	24VDC	3 Step	15W/mt	≥92	6000K	960~1300LM/mt	3M VHB 5952	Epistar	IP67
AV0116LU-E	5000x15x15 mm	50mm	140	24VDC	3 Step	15W/mt	≥92	Verde	960~1300LM/mt	3M VHB 5952	Epistar	IP67

**Lunghezza Flex standar 5mt, lunghezza custom da 0,1 a 20mt.
Tipologia cavo: 2x0,5mm² - 20AWG wire.

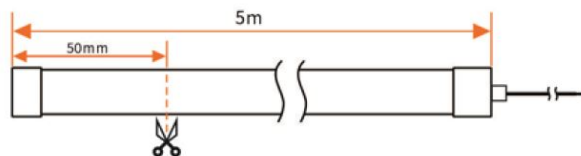

TOP VIEW - FLESSIONE VERTICALE R<60 mm

TOP VIEW - FLESSIONE VERTICALE

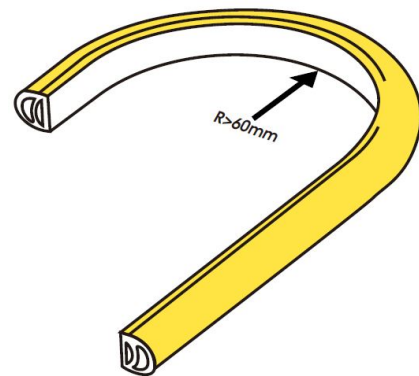

ACCESSORI:



Tappi con foro AV0074LU-E
Tappo senza foro AV0033LU-E



Clip di fissaggio AV0069LU-E



Forbici per taglio flex AV9999LU-E