


FLEX NEON **D18** 360° 24V IP65 TAGLIO LIBERO



CODICE	PARAMETRI BASE						PARAMETRI FOTOMETRICI					
	Misure	Unità di taglio	LED/mt	Input Volt	MacAdam ellipse	Watt	CRI	Colore Luce	Lumen nominali	Adesivo	Chip	IP
AV0138LU-E	1000xØ18 mm	Free cutting	420	24VDC	3 Step	14,4W/mt	≥80	2700K	1140~1340LM/mt	No	Epistar	IP65
AV0065LU-E	1000xØ18 mm	Free cutting	420	24VDC	3 Step	14,4W/mt	≥80	3000K	1140~1340LM/mt	No	Epistar	IP65
AV0134LU-E	1000xØ18 mm	Free cutting	420	24VDC	3 Step	14,4W/mt	≥80	4000K	1140~1340LM/mt	No	Epistar	IP65

**Lunghezza Flex standard 1mt, lunghezza custom da 0,5 a 5mt.

Tipologia cavo: 2x0,5mm² - 20AWG wire.

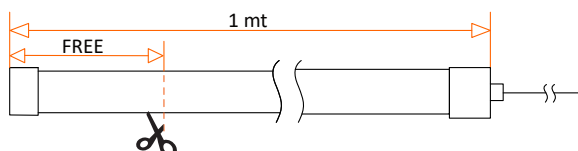

FLESSIONE LIBERA R<250 mm



ACCESSORI:



Tappo con foro: AV0135LU-E
Tappo senza foro: AV0136LU-E



Clip di fissaggio: AV0137LU-E