









COLORI

-  5500K
-  4000K
-  3000K
-  2700K
-  Ambra
-  Rossa
-  Verde
-  Blu

\*\*3000K CRI>90 Su richiesta

FINITURE

Inox  
AISI 316 L



CODICE: AV01517GN

IP67



Cavo 150 cm incluso  
SUB4 FROST-UV 2x0,50



Potenza:  
1W



110Lm  
(3000K-350mA)



Collegare in serie:  
350mA



CRI  
>80



50  
gr



OTTICHE



20° 35° 50° 20°x45° 45°


EMISSIONE LUMINOSA / DIAGRAMMA CONICO

|     |      |             |      |
|-----|------|-------------|------|
| 0,5 | 0,13 | E (0°)      | 3685 |
|     |      | E (C0) 7,3° | 1824 |
| 1,0 | 0,26 | E (0°)      | 921  |
|     |      | E (C0) 7,3° | 456  |
| 1,5 | 0,38 | E (0°)      | 409  |
|     |      | E (C0) 7,3° | 203  |
| 2,0 | 0,51 | E (0°)      | 230  |
|     |      | E (C0) 7,3° | 114  |
| 2,5 | 0,64 | E (0°)      | 147  |
|     |      | E (C0) 7,3° | 73   |
| 3,0 | 0,77 | E (0°)      | 102  |
|     |      | E (C0) 7,3° | 51   |


Distanza (m)      Diametro Cono (m)      Illuminamento (lx)

— C0 - C180 (Angolo di dimezzamento: 14,6°)

DIMENSIONI

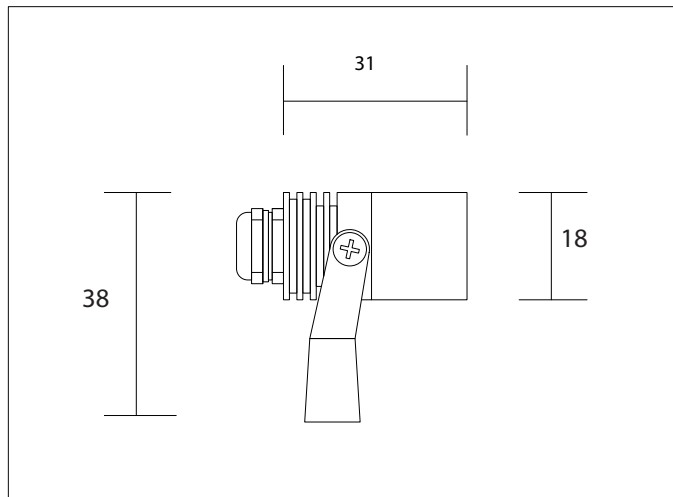

CONNESSIONI

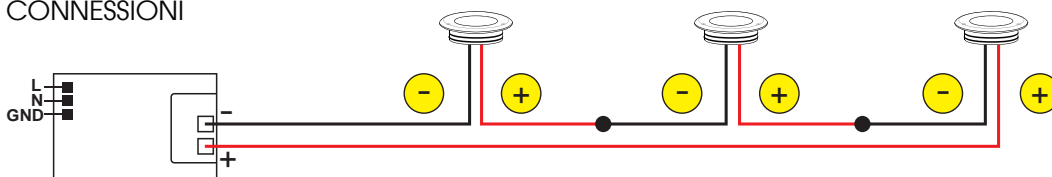

**ATTENZIONE**

I singoli faretto LED vanno collegati in serie, rispettando la polarità.

Alimentare l'impianto solo dopo il collegamento di tutti i faretto.