



**SPECIALTY SERIES |**




- 1800K ● 2200K ● 2400K ● 2700K ● 3000K
- 3500K ● 4000K ● 4500K ● 5000K ● 5700K
- 6000K ● 6500K

**IP Options & Lumen Index**

- Exposed **IP20(N)**
- x1**
- Nano coating **IP65(A)**
- x0.98**
- Silicone sleeve **IP67(T)**
- x0.98**

**5050 64LED 24V 10mm**

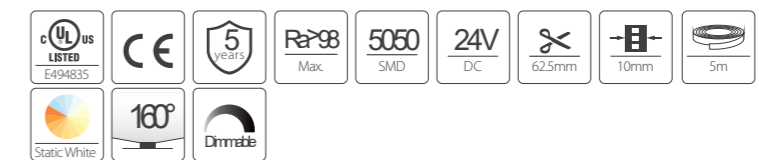

Model No.	
<b>Power</b>	<b>20W/m</b>
PCB width	10mm
Lumen output (4000K)	2660Lm/m CRI 80+ 2340Lm/m CRI 90+ 2100Lm/m CRI 95+ 1820Lm/m CRI 98+
MAXRUN	4m
LEDs/m	5050 64LEDs/m
Cut Length	62.5mm (4LEDs)
Voltage	24 VDC
CCT	1800K~6500K
CRI	CRI 80+~98+
Dimmable	Yes (PWM, DALI, 0/1-10V, Triac)
IP Rating	IP20
Operating temp.	-35°C ~ 50°C
Beam Angle	120°
Strip length/reel	0.5m ~ 50m
Lifespan	50,000Hrs

**Cut points**

