



# FLEX NEON 1004 FLAT 24V IP65




CODICE	PARAMETRI BASE						PARAMETRI FOTOMETRICI					
	Misure	Unità di Taglio	LED/mt	Input Volt	MacAdam ellipse	WaĖ	CRI	Colore Luce	Lumen nominali	Adesivo	Chip	IP
AV0172LU-E	5000x10x04mm	8,33mm	480	24VDC	3 Step	8W/mt	≥90	3000K	480LM/mt	3M VHB 5952	Epistar	IP65
AV0173LU-E	5000x10x04mm	8,33mm	480	24VDC	3 Step	8W/mt	≥90	4000K	480LM/mt	3M VHB 5952	Epistar	IP65
AV0174LU-E	5000x10x04mm	8,33mm	480	24VDC	3 Step	8W/mt	≥90	6000K	480LM/mt	3M VHB 5952	Epistar	IP65

\*\*Lunghezza Flex standard 5mt, lunghezza custom da 0,1 a 20mt.  
Tipologia cavo: 2x0,5mm<sup>2</sup> - 20AWG wire.

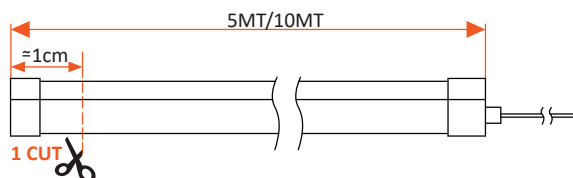

TOP VIEW - FLESSIONE VERTICALE  
R < 60 mm



ACCESSORI:



Tappo con senza foro  
Tappo con foro



Clip di fissaggio  
Profilo in alluminio 1MT

