

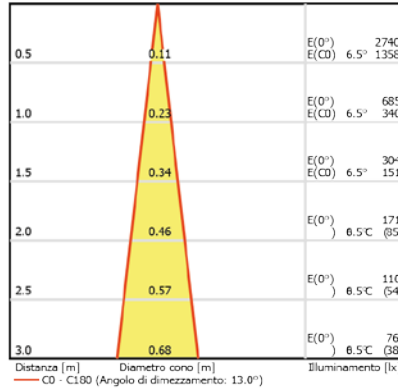
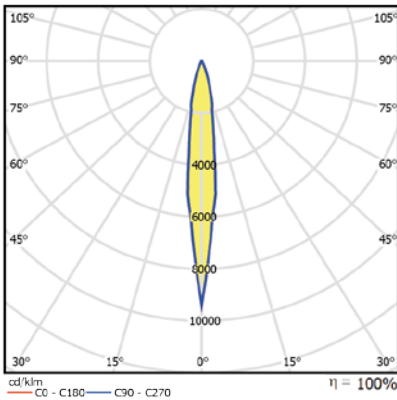


PHOTOMETRIC FILES



NARROW 350 mA

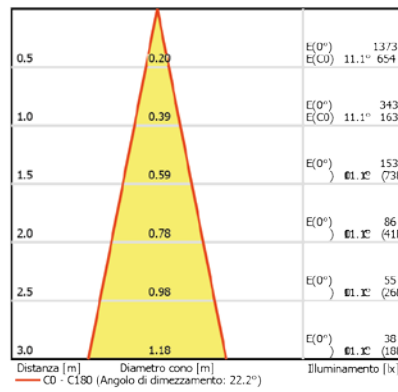



MEDIUM 350 mA

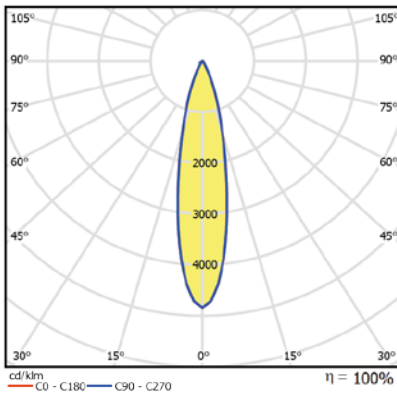

WIDE 350 mA

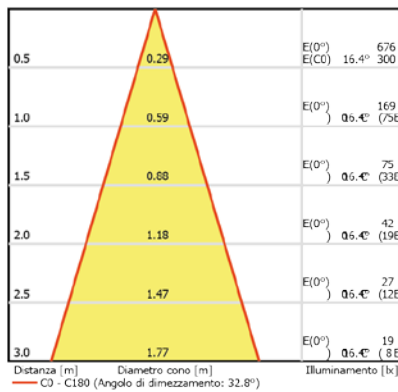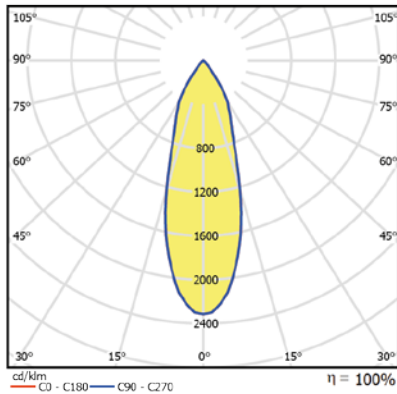


VERY WIDE 350 mA

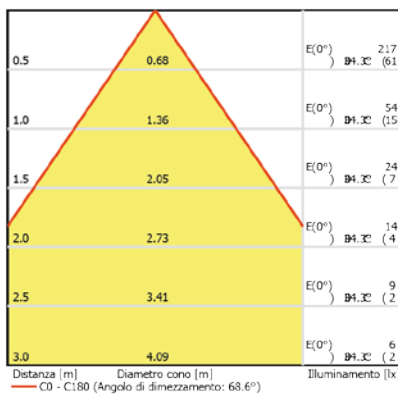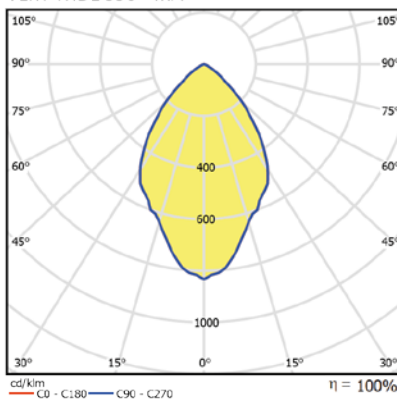

PHOTOMETRIC FILES

EXTRA WIDE 350 mA

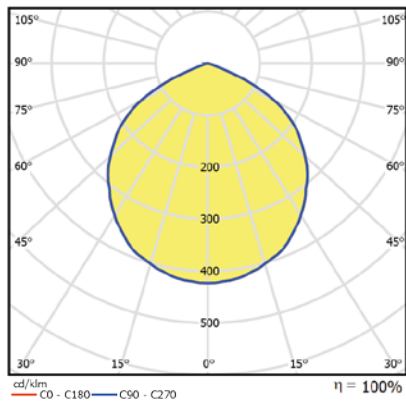

Distanza [m]	Diámetro cono [m]	Iluminamento [lx]
0.5	1.35	$E(0^\circ) \left. \begin{array}{l} 83.4 \\ 146 \end{array} \right\}$
1.0	2.69	$E(0^\circ) \left. \begin{array}{l} 34 \\ 44 \end{array} \right\} 83.4$
1.5	4.04	$E(0^\circ) \left. \begin{array}{l} 15 \\ 24 \end{array} \right\} 83.4$
2.0	5.39	$E(0^\circ) \left. \begin{array}{l} 8 \\ 14 \end{array} \right\} 83.4$
2.5	6.73	$E(0^\circ) \left. \begin{array}{l} 5 \\ 11 \end{array} \right\} 83.4$
3.0	8.08	$E(0^\circ) \left. \begin{array}{l} 4 \\ 10 \end{array} \right\} 83.4$

C0 - C180 (Angolo di dimezzamento: 106.6°)