


# AV02223GN

## PHOTOMETRIC FILES

8° - 4W - 4000°K

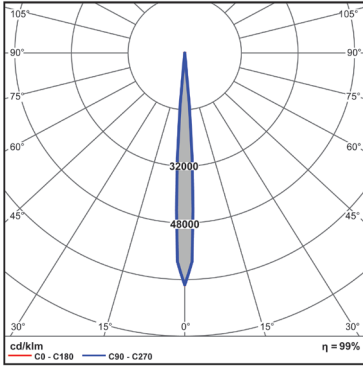


Distanza [m]	Diametro cono [m]	E(0°) E(C0)	3.8°	Iluminamento [lx]
0.50	0.07	11010	5482	
1.0	0.13	2752	1371	
1.5	0.20	1223	609	
2.0	0.27	688	343	
2.5	0.33	440	219	
3.0	0.40	306	152	

Distanza [m]    Diametro cono [m]    Iluminamento [lx]

— C0 - C180 (Angolo di dimezzamento: 7.6°)

25° - 4W - 4000°K

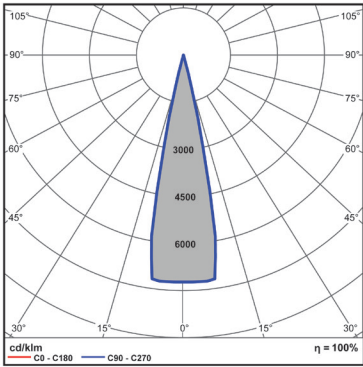


Distanza [m]	Diametro cono [m]	E(0°) E(C0)	11.5°	Iluminamento [lx]
0.50	0.20	2225	1076	
1.0	0.41	556	269	
1.5	0.61	247	120	
2.0	0.81	139	67	
2.5	1.0	89	43	
3.0	1.2	62	30	

Distanza [m]    Diametro cono [m]    Iluminamento [lx]

— C0 - C180 (Angolo di dimezzamento: 23.0°)

45° - 4W - 4000°K

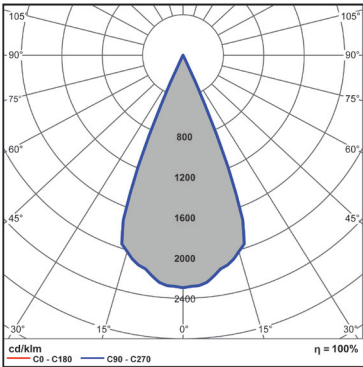

Distanza [m]	Diametro cono [m]	E(0°) E(C0)	22.1°	Iluminamento [lx]
0.50	0.41	1248	501	
1.0	0.81	312	125	
1.5	1.2	139	56	
2.0	1.6	78	31	
2.5	2.0	50	20	
3.0	2.4	35	14	

Distanza [m]    Diametro cono [m]    Iluminamento [lx]

— C0 - C180 (Angolo di dimezzamento: 44.2°)