

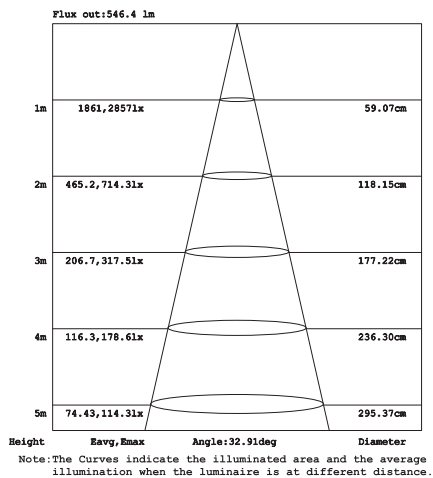


FLEX WALLWASHER 3D 2323 IP67 1MT


FOTOMETRIE:

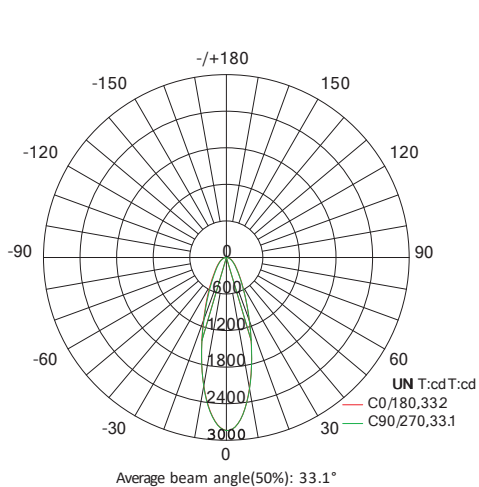

(4000K, 18W, CRI>80, 30°)



30° Side View

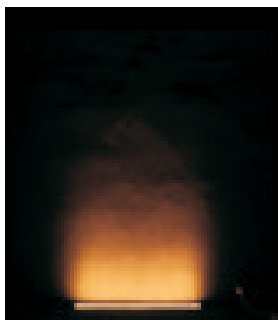

30° Front View
 Distance to the wall is 50mm
 Graze height on the wall is 1500mm



30° Front View
 Distance to the wall is 100mm
 Graze height on the wall is 2000mm





30° Front View
 Distance to the wall is 200mm
 Graze height on the wall is 3000mm



30° Front View
 Distance to the wall is 300mm
 Graze height on the wall is 3800mm




DIAGRAMMA CONNESSIONI:

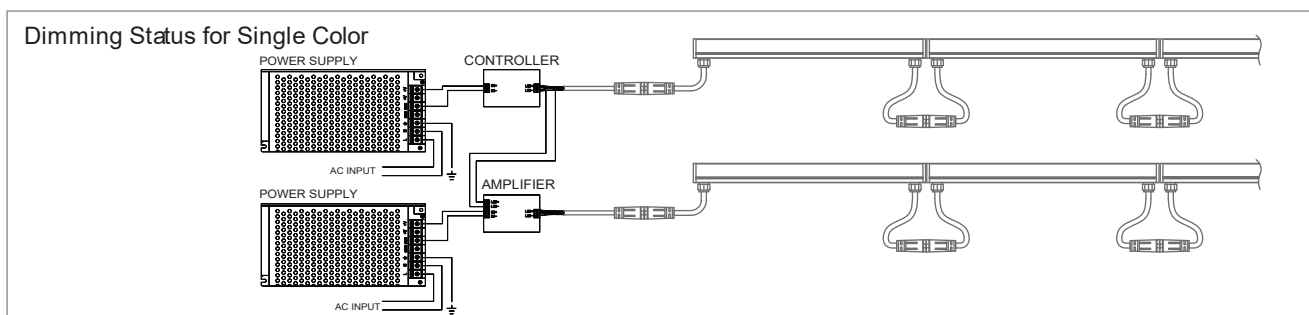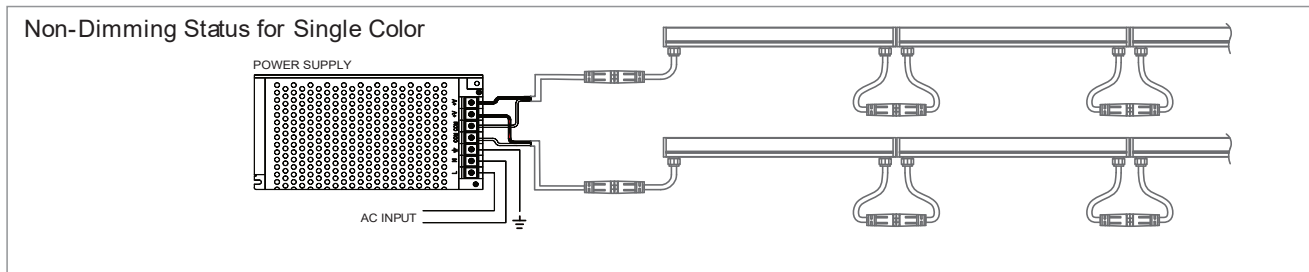



FLEX WALLWASHER 3D 2323 IP67 1MT

ACCESSORI:




Profilo in alluminio da 1MT
Cod. AV5991XIAA

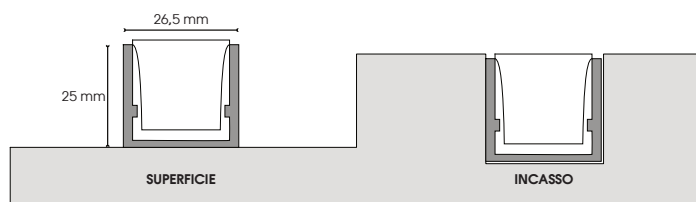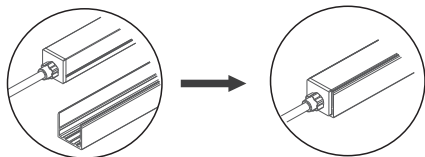



Profilo in alluminio flessibile da 10MT
Cod. AV5992XIAA

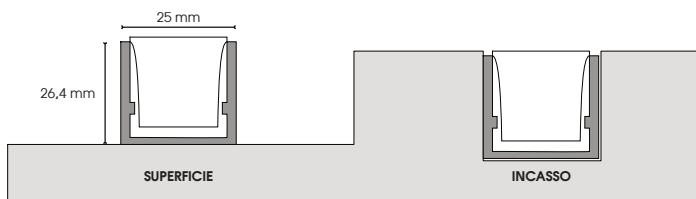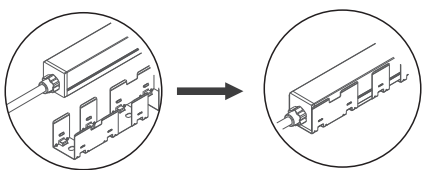



Kit 2 ganci inox
Cod. AV5993XIAA

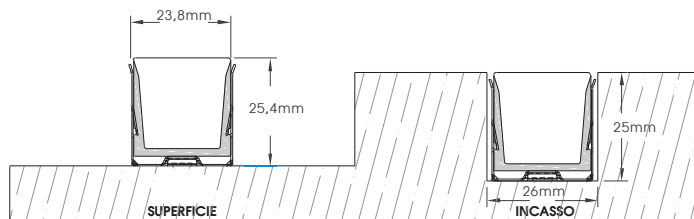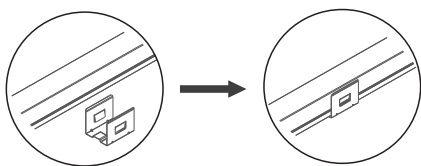


Kit 2 ganci in plastica trasparente
Cod. AV5994XIAA

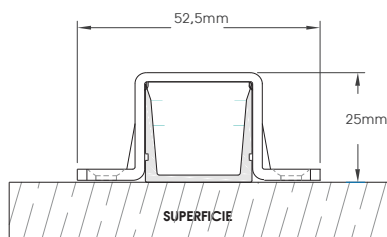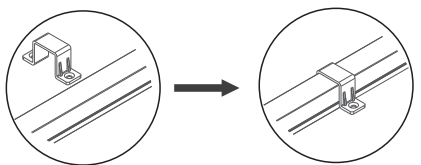


Kit 2 staffe orientabili 45° e 90°.
Cod. AV5995XIAA

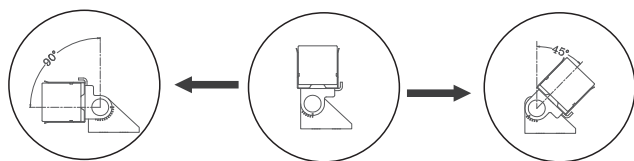

A TERRA




A PARETE




A SOFFITTO

FLEX WALLWASHER 3D 2323 IP67 1MT

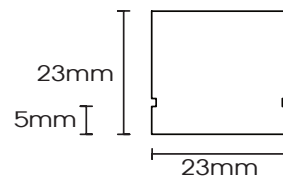


| CODICE | PARAMETRI BASE | | | | PARAMETRI FOTOMETRICI | | | | |
|------------|----------------|--------|------------|--------|-----------------------|-------------|--|----------------|------|
| | Misure | LED/mt | Input Volt | Watt | CRI | Colore Luce | | Lumen nominali | IP |
| AV5990WIAA | 1000x23x23 mm | 24/mt | 24VDC | 18W/mt | ≥80 | 2700K | | 1700LM/mt | IP67 |
| AV5989NIAA | 1000x23x23 mm | 24/mt | 24VDC | 18W/mt | ≥80 | 4000K | | 1700LM/mt | IP67 |
| AV5988CIAA | 1000x23x23 mm | 24/mt | 24VDC | 18W/mt | ≥80 | 6000K | | 1700LM/mt | IP67 |

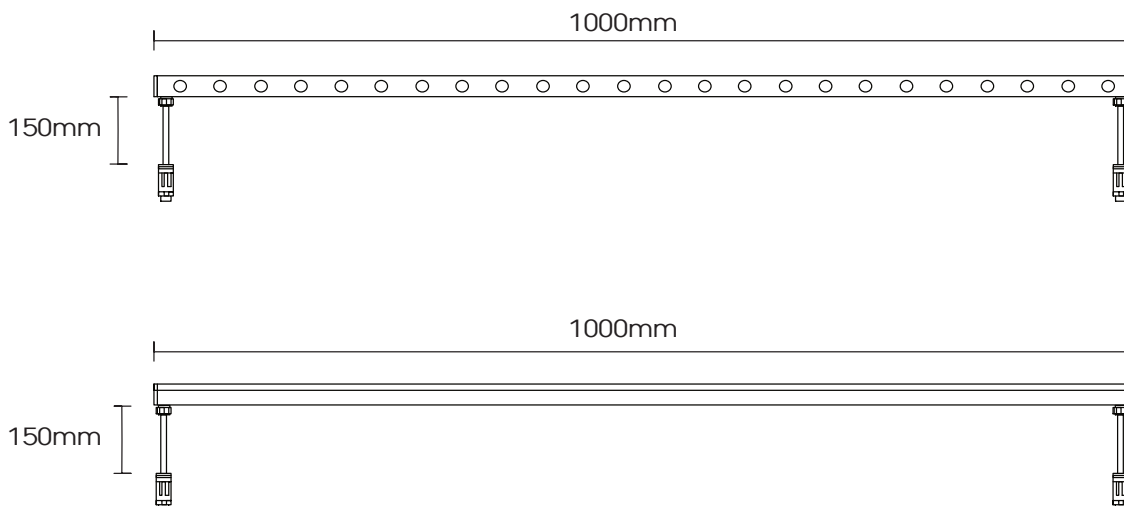




** Tipologia cavo: 2x0,75mm² - 2x18AWG wire. + Connettore con innesto IP67

FLESSIONE SU TUTTI I LATI:

Flessione laterale



Flessione verticale

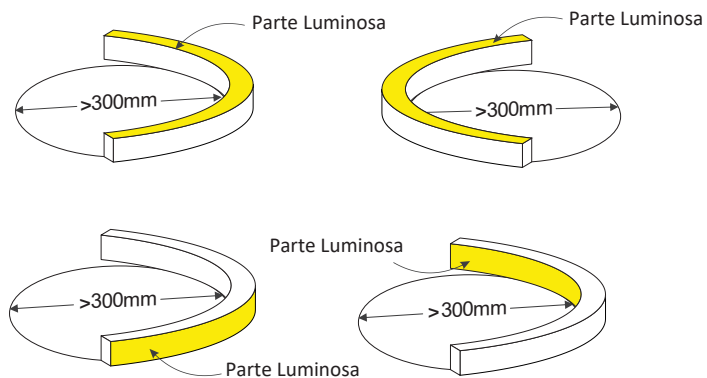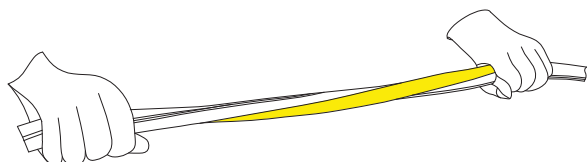

Max. Angolo di torsione è 360° per 1000mm.