

AV6037XIAA

NEW

ILLUMINATED COMPOSITIONS IN A WALL SYSTEM

- decorative lighting, invisible profile and cover
- profile for finishing of plasterboards with a minimum thickness of 12,5 mm
- many possible arrangements
- Slick socket
- maximum LED strip width: 10 mm






AV6037XIAA



A A slide cover

C2 C2 click cover

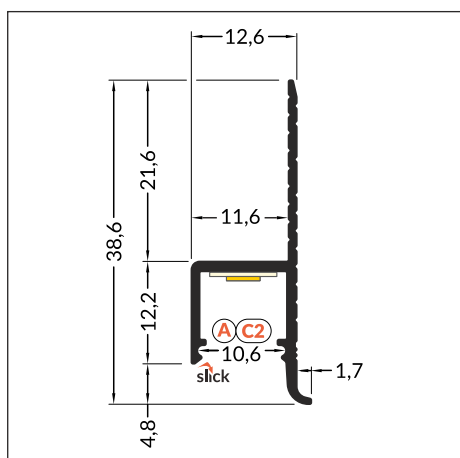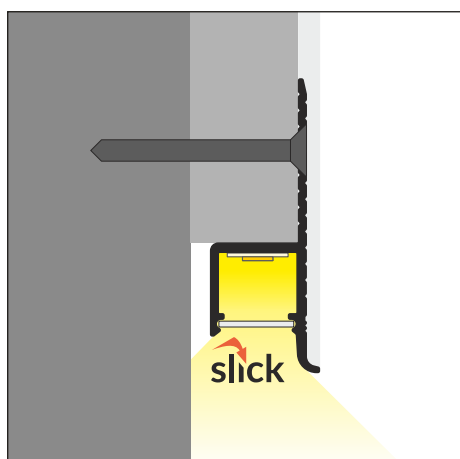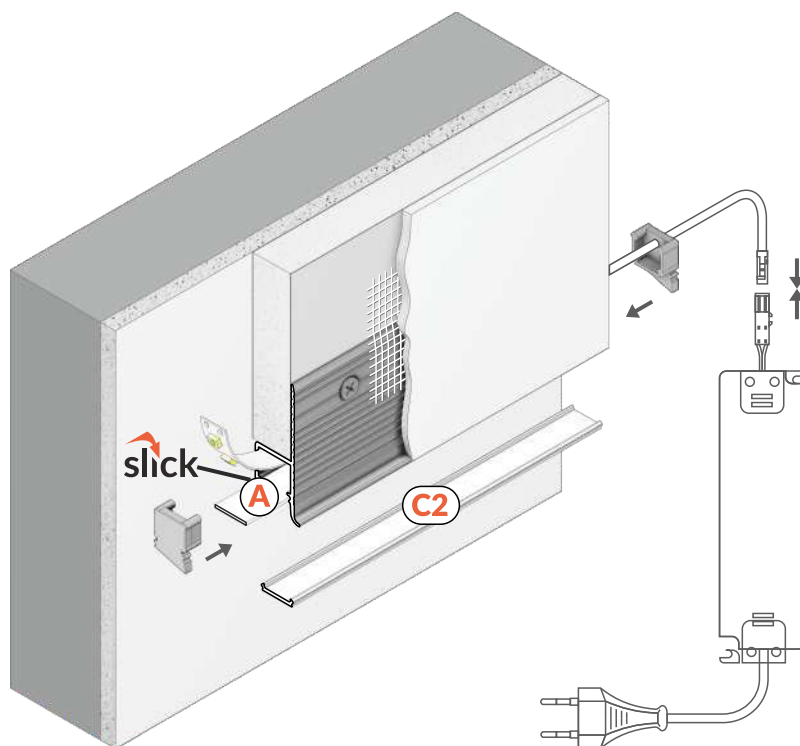

max 10 mm



special application

INDEX = 1 pc, length 2000 mm




anodized

raw aluminium

Available lengths: 1000 mm, 2000 mm, 3000 mm, 4000 mm.
The standard profile length tolerance is +20 mm.
More details >> 1.08.




AV6037XIAA

EXAMPLES OF POSSIBILITIES

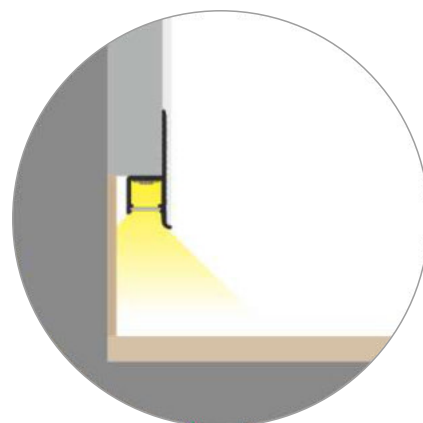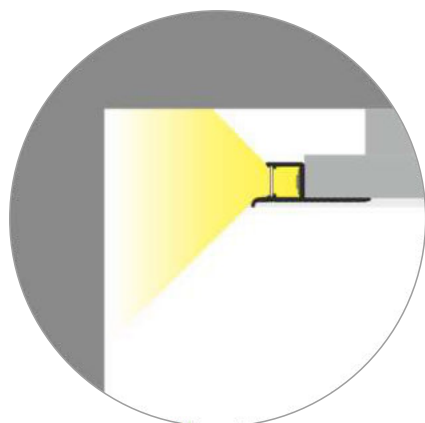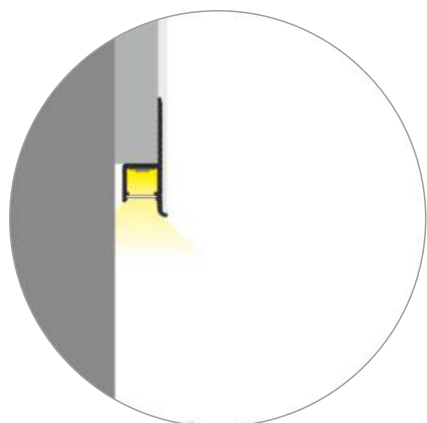

AV6037XIAA

EXAMPLES OF POSSIBILITIES

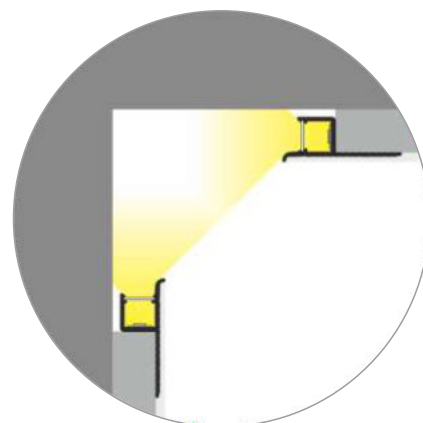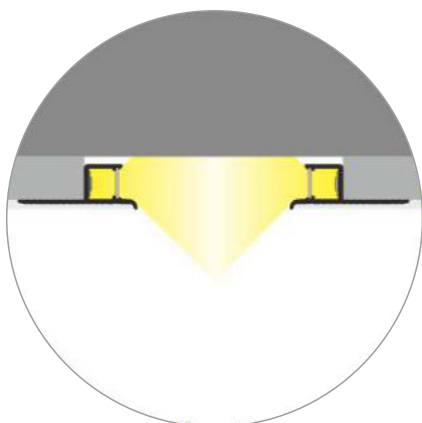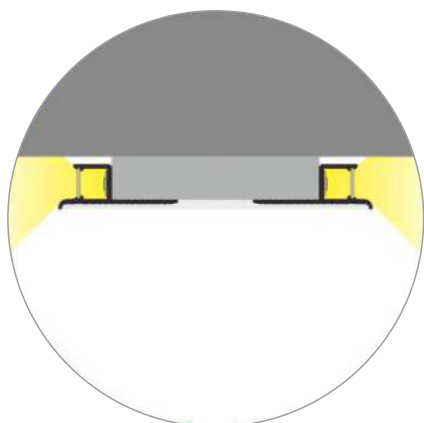


ACCESSORIES

COVERS

A slide cover
colours: transparent, frosted, opal
material: PC, PP, PP



Note! Dimensions of the space to install LED source



length 2000 mm

A transparent


A frosted

A opa

C2 transparent

C2 opal


C2 click cover
colours: transparent, opal
material: PMMA



The standard cover length tolerance is +20 mm.

ENDINGS

ending
colours: grey
material: ABS



INDEX = 10 sets = 20 pcs
package > check the pricelist

grey

