


PANNELLO LED 120x30 40W DRIVER LIFUD NO FLICKER e CON EMERGENZA




CODICE	PARAMETRI BASE				INFO			
	Misure	Input Volt	Watt	Lumen	CRI	Colore Luce	Driver	IP
AV6188_SAA	1195x295x30mm	220-240V	40W	4000LM	≥80	3000K-4000K-6000K	●●● LIFUD	IP40
AV6362_SAA	1195x295x30mm	220-240V	40W	4000LM	≥80	3000K-4000K-6000K	●●● LIFUD No flicker	IP40
AV6372_SAA	1195x295x30mm	220-240V	40W	4000LM	≥80	3000K-4000K-6000K	●●● LIFUD con emergenza	IP40

DIMENSIONI

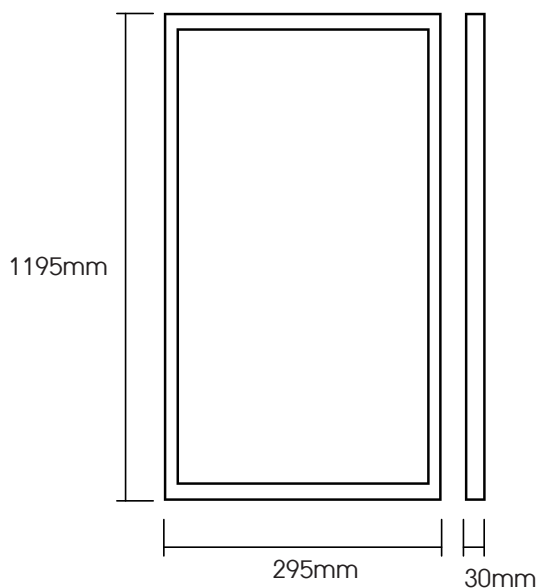

ACCESSORI



Cod. AV2019XSAA
Kit di sospensione



Cod. AV2200XSAA
Kit incasso



Cod. AV2020XSAA
Kit plafone