

PANNELLO LED 60X60 40W DRIVER PHILIPS NO FLICKER

IP40

GARANZIA
3 ANNI

CE

RoHS
COMPLIANTTUV
SUDUK
CA

PHILIPS



40W WATT

220-240V

4000Lm LUMEN


CRI >80 CRI

UGR <19 UGR

120° OTTICA

| CODICE | PARAMETRI BASE | | | | INFO | | | | | |
|------------|----------------|------------|------|--------|------|-------------|-----|---------|--------------------|------|
| | Misure | Input Volt | Watt | Lumen | CRI | Colore Luce | LED | Driver | IP | |
| AV6758CSAA | 595x595x30mm | 220-240V | 40W | 4000LM | ≥80 | 5000K | | SMD2835 | PHILIPS No Flicker | IP40 |
| AV6758NSAA | 595x595x30mm | 220-240V | 40W | 4000LM | ≥80 | 4000K | | SMD2835 | PHILIPS No Flicker | IP40 |
| AV6758WSAA | 595x595x30mm | 220-240V | 40W | 4000LM | ≥80 | 3000K | | SMD2835 | PHILIPS No Flicker | IP40 |

DIMENSIONI

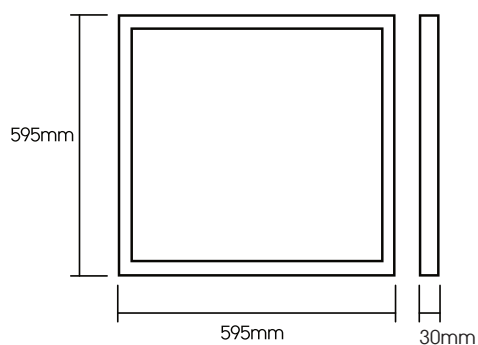


ACCESSORI Acquistabili separatamente



Corice per l'installazione e il montaggio a incasso a soffitto
CODICE: AV2199XSAA



Kit di montaggio a superficie
CODICE: AV2017XSAA



Kit di sospensione
CODICE: AV6255XSAA



Kit 4 clips per montaggio incasso
CODICE: AV3754XSAA